


ASUS Pro WS X299 Sage II - motherboard - SSI CEB - LGA2066 Socket - X299

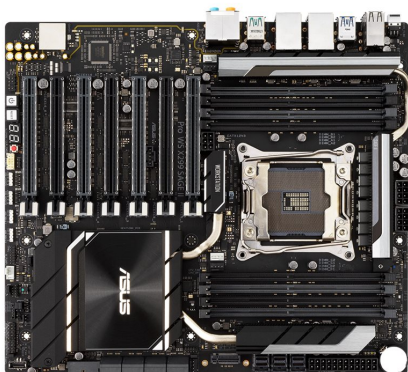

21-09-2024

SKU	90SW00U0-M0EAY0
Produktbeskrivelse:	ASUS Pro WS X299 Sage II - bundkort - SSI CEB - LGA2066 Socket - X299
Produkttype:	Bundkort - SSI CEB
Chipsættype:	Intel X299
Processor-socket:	1 x LGA2066 Socket
Kompatible processorer:	Core X
Max RAM-størrelse:	256 GB
RAM understøttet:	8 DIMM åbninger - DDR4, ikke-ECC, ikke bufferet

Generelt

Produkttype:	Bundkort - SSI CEB
Chipsættype:	Intel X299
Processor-socket:	LGA2066 Socket
Max antal processorer:	1
Kompatible processorer:	Core X

Understøttet RAM

Maks. størrelse:	256 GB
Teknologi:	DDR4
Bus Clock:	2400 MHz, 2666 MHz, 2933 MHz, 3600 MHz (O.C.), 4000 MHz (O.C.), 4133 MHz (O.C.), 4266 MHz (O.C.), 4200 MHz (O.C.)

Understøttet RAM-integritetskon:	Ikke-ECC
Registreret eller buffer:	Ikke bufferet
Egenskaber:	Intel Extreme Memory Profiles (XMP)

Audio

Type:	HD Audio (8-kanaler)
Audio codec:	Realtek ALCS1220A

Diverse

Udstyr inkluderet:	I/O- bagvæg, 1 x M.2 skrue, 2-Way SLI Bridge, lodret M.2 bøjlesæt, MOS-kølingssæt, 3-Way SLI Bridge, Q-Connector, 4-Way SLI Bridge
Medfølgende ledninger:	1 x seriel-panel 8 x Seriel ATA kabel
Med software:	ASUS AI Charger+, ASUS AI Suite III, ASUS Turbo App
Bredde:	30.5 cm
Dybde:	26.7 cm

Egenskaber

BIOS-egenskaber:	Flersproget BIOS, ASUS EZ Flash, USB BIOS Flashback
------------------	---

Audio

Overensstemmelsesstandarder: DTS Connect, High Definition Audio, DTS Headphone:X, DTS:X Ultra

LAN

Netværk controller: Intel I225-LM

Netværks interfaces: 2 x Gigabit Ethernet

Egenskaber

Hardware egenskaber:

CrashFree BIOS, jack retasking, ASUS Q-Design, ESD Guards, Q-DIMM, ASUS EZ DIY, Q-LED, Q-Slot, ASUS Q-Connector, audio jack detektions teknologi, ASUS EPU (Energy Processing Unit), ASUS Q-Shield, ASUS TPU (TurboV Processing Unit), Intel Smart Response Technology, NVIDIA 4-way SLI Technology Support, ASUS 8 Phase CPU Power Design, ASUS DIGI+ Power Control, ASUS 2 Phase DRAM Power Design, AMD 4-vejs CrossFireX teknologisupport, ASUS Enhanced DRAM Overcurrent Protection, Clear CMOS Button, ASUS Stainless Steel Back I/O, ASUS Fan Xpert 3, Dual Intelligent Processors 5, ASUS Overvoltage Protection, ASUS Crystal Sound 3, Intel Turbo Boost Technology 3.0, Intel Optane Memory Ready, ASUS 5X Protection III, ASUS SafeSlot Core, Intel VROC support, ASUS PRO Clock II Technology, ASUS Aura Sync

Ekspansion / Konnektivitet

Ekspansionsåbninger: 1 x CPU ; 8 x DIMM 288-pins ; 7 x PCIe 3.0 x16 (x16, x16/x16, x16/x16/x16, x16/x16/x16/x16, x16/x8/x8/x8/x8/x8/x8/x8 tilstand)

Grænseflade (lagring):

SATA-600 -stikforbindelser: 8 x 7-pin Serial ATA - RAID 0 / RAID 1 / RAID 10 / RAID 5 ; PCIe 3.0 -stikforbindelser: 2 x M.2 ; PCIe 3.0 -stikforbindelser: 3 x U.2

RAID-egenskaber:

Intel Rapid Storage Technology

Interface:

2 x LAN (Gigabit Ethernet) ; 6 x USB 3.2 Gen 1 ; 4 x USB 2.0 ; 1 x TOSLINK ; 1 x USB 3.2 Gen 2 ; 1 x USB-C Gen2 ; 1 x audio linje-ud - mini-jack ; 1 x mikrofon - mini-jack ; 1 x audio linje-ud (centrum/subwoofer) - mini-jack ; 1 x audio linje-ud (bagtil) - mini-jack ; 1 x audio linje-ind - mini-jack

Interne interfaces:

2 x USB 3.2 Gen 1 - intern stik ; 1 x USB 3.2 Gen 2 - intern stik ; 1 x seriel - intern stik ; 1 x Thunderbolt - intern stik

Ekspansion / Konnektivitet

Strømkontakter:

24-pin hovedstrøm-konnektor,
6-pins ATX12V stikforbindelse,
2 x 8-pins ATX12V
stikforbindelser

