


ASUS WS C422 Pro/SE - motherboard - ATX - LGA2066 Socket - C422

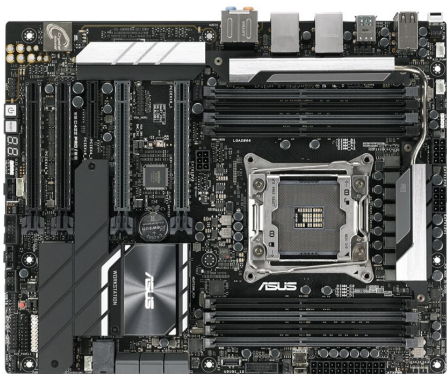

11-05-2024

SKU	90SW0080-M0EAY0
Produktbeskrivelse:	ASUS WS C422 Pro/SE - bundkort - ATX - LGA2066 Socket - C422
Produkttype:	Bundkort - ATX
Chipsættype:	Intel C422
Processor-socket:	1 x LGA2066 Socket
Kompatible processorer:	Xeon
Max RAM-størrelse:	512 GB
RAM understøttet:	8 DIMM åbninger - DDR4, ECC, registreret, Load-Reduced

Generelt

Produkttype:	Bundkort - ATX
Chipsættype:	Intel C422
Processor-socket:	LGA2066 Socket
Max antal processorer:	1
Kompatible processorer:	Xeon

Understøttet RAM

Maks. størrelse:	512 GB
Teknologi:	DDR4
Bus Clock:	2400 MHz, 2133 MHz, 2666 MHz
Understøttet RAM-integritetskon:	ECC
Registreret eller buffer:	Registreret, Load-Reduced
Egenskaber:	Quad kanal hukommelses arkitektur

Audio

Type:	HD Audio (8-kanaler)
Audio codec:	Realtek ALC51220A
Overensstemmelsesstandarder:	DTS Connect, High Definition Audio, DTS Headphone:X

Producentgaranti

Service & Support:	Begrænset garanti - 3 år
--------------------	--------------------------

Diverse

Med software:	ASUS AI Charger+, ASUS Control Center
Bredde:	30.5 cm
Dybde:	24.4 cm

Egenskaber

BIOS-egenskaber:	Flersproget BIOS, ASUS Quiet Thermal Solution, USB BIOS Flashback, ASUS EZ Flash 3
Hardware egenskaber:	Jack retasking, MemOK!, ASUS Q-Design, ESD Guards, Q-DIMM, ASUS EZ DIY, Q-LED, Q-Slot, CrashFree BIOS 3, audio jack detektions teknologi, ASUS Q-Shield, NVIDIA 3-way SLI Technology Support, Intel Turbo Boost Technology 2.0, ASUS 8 Phase CPU Power Design, Q-Code, AMD 3-vejs CrossFireX teknologisupport, ASUS 2 Phase DRAM Power Design, ASUS Enhanced DRAM Overcurrent Protection, ASUS Stainless Steel Back I/O, Turbo LAN, ASUS Overvoltage Protection, ASUS Crystal Sound 3, AURA RGB Lighting Control, ASUS 5X Protection III, ASUS SafeSlot Core, Intel VROC support, M.2 kølelegeme, ASMB9-iKVM

LAN

Netværk controller:	Intel I210-AT
Netværks interfaces:	2 x Gigabit Ethernet

Ekspansion / Konnektivitet

Ekspansionsåbninger:	1 x CPU 8 x DIMM 288-pins 2 x PCIe 3.0 x16 2 x PCIe 3.0 x16 (dual x8 mode; single kort: x16 mode) 1 x PCIe 3.0 x4
----------------------	---

Grænseflade (lagring):	SATA-600 -stikforbindelser: 6 x 7-pin Serial ATA - RAID 0 / RAID 1 / RAID 10 SATA-600 / PCIe 3.0 -stikforbindelser: 1 x M.2 PCIe 3.0 -stikforbindelser: 1 x U.2 PCIe 3.0 -stikforbindelser: 1 x M.2
------------------------	---

Interface:	2 x LAN (Gigabit Ethernet) 4 x USB 3.1 Gen 1 4 x USB 2.0 1 x TOSLINK 1 x USB 3.1 Gen 2 1 x USB-C Gen2 1 x audio linje-ud - mini-jack 1 x mikrofon - mini-jack 1 x audio linje-ud (centrum/subwoofer) - mini-jack 1 x audio linje-ud (bagtil) - mini-jack 1 x audio linje-ind - mini-jack
------------	--

Interne interfaces:	2 x USB 2.0 - intern stik 2 x USB 3.1 Gen 1 - intern stik 1 x USB 3.1 Gen 2 - intern stik 1 x seriel - intern stik 1 x Thunderbolt - intern stik
---------------------	--

Strømkontakter:	24-pin hovedstrøm-konnektor, 6-pins ATX12V stikforbindelse, 2 x 8-pins ATX12V stikforbindelser
-----------------	--

