


ASUS WS X299 PRO/SE - motherboard - ATX - LGA2066 Socket - X299

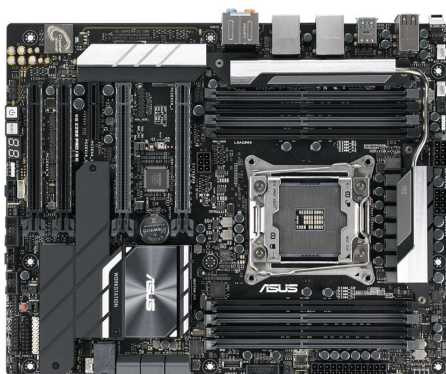

26-09-2024

SKU	90SW00A0-M0EAY0
Produktbeskrivelse:	ASUS WS X299 PRO/SE - bundkort - ATX - LGA2066 Socket - X299
Produkttype:	Bundkort - ATX
Chipsættype:	Intel X299
Processor-socket:	1 x LGA2066 Socket
Kompatible processorer:	Core X
Max RAM-størrelse:	128 GB
RAM understøttet:	8 DIMM åbninger - DDR4, ikke-ECC, ikke bufferet

Generelt

Produkttype:	Bundkort - ATX
Chipsættype:	Intel X299
Processor-socket:	LGA2066 Socket
Max antal processorer:	1
Kompatible processorer:	Core X

Understøttet RAM

Maks. størrelse:	128 GB
Teknologi:	DDR4
Bus Clock:	2400 MHz, 2666 MHz, 3600 MHz (O.C.), 4000 MHz (O.C.), 4133 MHz (O.C.)
Understøttet RAM-integritetskon:	Ikke-ECC
Registreret eller buffer:	Ikke bufferet
Egenskaber:	Intel Extreme Memory Profiles (XMP)

Audio

Type:	HD Audio (8-kanaler)
Audio codec:	Realtek ALC51220A

Producentgaranti

Service & Support:	Begrænset garanti - 3 år
--------------------	--------------------------

Diverse

Med software:	ASUS AI Charger+, ASUS Control Center
Bredde:	30.5 cm
Dybde:	24.4 cm

Egenskaber

BIOS-egenskaber:	ASUS Quiet Thermal Solution, USB BIOS Flashback
------------------	---

Hardware egenskaber:	Jack retasking, ASUS Q-Design, ESD Guards, Q-DIMM, Q-LED, Q-Slot, ASUS Q-Connector, audio jack detektions teknologi, ASUS EPU (Energy Processing Unit), ASUS Q-Shield, NVIDIA 3-way SLI Technology Support, Intel Smart Response Technology, ASUS 8 Phase CPU Power Design, Q-Code, AMD 3-vejs CrossFireX teknologisupport, ASUS 2 Phase DRAM Power Design, ASUS 5X PROTECTION, ASUS Enhanced DRAM Overcurrent Protection, ASUS Stainless Steel Back I/O, Turbo LAN, ASUS Crystal Sound 3, AURA RGB Lighting Control, Intel Optane Memory Ready, Intel VROC support, ASUS PRO Clock II Technology, M.2 kølelegeme, ASMB9-iKVM
----------------------	---

Audio

Overensstemmelsesstandarder: DTS Connect, High Definition Audio, DTS Headphone:X

LAN

Netværk controller: Intel I210-AT

Netværks interfaces: 2 x Gigabit Ethernet

Ekspansion / Konnektivitet

Ekspansionsåbninger: 1 x CPU ; 8 x DIMM 288-pins ; 2 x PCIe 3.0 x16 ; 1 x PCIe 3.0 x16 (x8-modus) ; 1 x PCIe 3.0 x16 (x4-modus) ; 1 x PCIe 3.0 x4

Grænseflade (lagring): SATA-600 -stikforbindelser: 6 x 7-pin Serial ATA - RAID 0 / RAID 1 / RAID 10 / RAID 5 ; SATA-600 / PCIe 3.0 -stikforbindelser: 1 x M.2 ; PCIe 3.0 -stikforbindelser: 1 x U.2 ; PCIe 3.0 -stikforbindelser: 1 x M.2

RAID-egenskaber: Intel Rapid Storage Technology

Interface: 2 x LAN (Gigabit Ethernet) ; 4 x USB 3.1 Gen 1 ; 4 x USB 2.0 ; 1 x TOSLINK ; 1 x USB 3.1 Gen 2 ; 1 x USB-C Gen2 ; 1 x audio linje-ud - mini-jack ; 1 x mikrofon - mini-jack ; 1 x audio linje-ud (centrum/subwoofer) - mini-jack ; 1 x audio linje-ud (bagtil) - mini-jack ; 1 x audio linje-ind - mini-jack

Interne interfaces: 2 x USB 2.0 - intern stik ; 2 x USB 3.1 Gen 1 - intern stik ; 1 x VGA - intern stik ; 1 x seriel - intern stik ; 1 x Thunderbolt - intern stik ; 1 x USB 3.1 Gen 2 - intern stik

Strømkontakter: 24-pin hovedstrøm-konnektor, 6-pins ATX12V stikforbindelse, 2 x 8-pins ATX12V stikforbindelser

