


Lenovo ThinkSystem 940-8i - storage controller (RAID) - SATA / SAS 12Gb/s - PCIe 4.0 x8

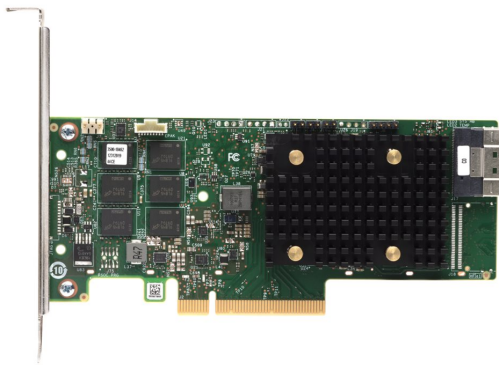

På lager(9)

SKU	4Y37A09728
Produktbeskrivelse:	Lenovo ThinkSystem 940-8i - styreenhed til lagring (RAID) - SATA / SAS 12Gb/s - PCIe 4.0 x8
Enhedstype:	Styreenhed til lagring (RAID) - indstikskort - lavprofil
Bustype:	PCIe 4.0 x8
Interface:	SATA / SAS 12Gb/s
Dataoverførselshastighed:	12 Gbit/s
Buffer størrelse:	4 GB
Understøttede enheder:	Harddisk, diskarray (RAID), solid state drev

Generelt

Enhedstype:	Styreenhed til lagring (RAID) - indstikskort - lavprofil
Host Bus:	PCIe 4.0 x8

Controller for lagring

Interface:	SATA / SAS 12Gb/s
Dataoverførselshastighed:	12 Gbit/s
Buffer størrelse:	4 GB
Understøttede enheder:	Harddisk, diskarray (RAID), solid state drev
Antal kanaler:	8
Maks. antal lagrenheder:	8

RAID-niveau:	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10, RAID 50, JBOD, RAID 60
Processor:	Broadcom SAS3908

Ekspansion / Konnektivitet

Interface:	1 x SAS 12Gb/s - Slim SAS (SFF-8654) (intern)
------------	---

Diverse

Oplysninger om kompatibilitet

Designet for:	Lenovo ThinkSystem SR250 7Y51 Lenovo ThinkSystem SR530 7X08 Lenovo ThinkSystem SR590 7X99 Lenovo ThinkSystem SR630 7X02 Lenovo ThinkSystem SR630 V2 7Z71 Lenovo ThinkSystem SR645 7D2X, 7D2Y Lenovo ThinkSystem SR650 7X06 Lenovo ThinkSystem SR650 V2 7D15, 7Z73 Lenovo ThinkSystem SR665 7D2V, 7D2W Lenovo ThinkSystem SR670 V2 7Z23 Lenovo ThinkSystem SR850 V2 7D32 Lenovo ThinkSystem SR860 V2 7Z60 Lenovo ThinkSystem ST250 7Y45 Lenovo ThinkSystem ST50 7Y48 Lenovo ThinkSystem ST550 7X10 Lenovo ThinkSystem ST650 V2 7Z74, 7Z75
---------------	--

Miljømæssige parametre

Min. driftstemperatur:	10 °C
Maks. driftstemperatur:	55 °C
Fugtighedsgrad ved brug:	20 - 80 % (ikke-kondenserende)

Producentgaranti

Service & Support:	Begrænset garanti - 1 år
--------------------	--------------------------

Diverse

Egenskaber:

Online Capacity Expansion (OCE), Online RAID Level Migration (RLM), SecureBoot, CacheVault flash cache-beskyttelse, S.M.A.R.T. support, Self-Encrypting Drive (SED) support, FastPath, SafeStore, konsistentstjek, hurtig initialisering, Patrol Read

Overensstemmelsesstandarder:

EN55022, EN55024, ICES-003 Class B, RoHS, WEEE, FCC CFR47 Part 15 B, VCCI V-3, AS/NZS CISPR 22, CNS 13438, IEC/UL 60950

Programmer / Systemkrav

OS nødvendig:

Microsoft Windows Server 2016, Microsoft Windows Server 2019, VMware ESXi 6.7 update 3, Red Hat Enterprise Linux 7.6, SUSE Linux Enterprise Server 15 SP1, Red Hat Enterprise Linux 8.1, SUSE Linux Enterprise Server 12 SP5, VMware ESXi 7.0, SUSE Linux Enterprise Server 12 SP5 with Xen, SUSE Linux Enterprise Server 15 SP1 with Xen

