

Moxa NPort W2250A - wireless device server Wi-Fi



Ikke på lager

SKU	NP-W2250A
Produktbeskrivelse:	Moxa NPort W2250A - server til trådløse enheder Wi-Fi
Enhedstype:	Server til trådløse enheder
Formfaktor:	Ekstern
RAM:	20 MB
Antal porte:	2
Dataforbindelsesprotokol:	Ethernet, Fast Ethernet, RS-232, IEEE 802.11b, IEEE 802.11a, IEEE 802.11g, RS-422, RS-485
OS nødvendig:	SCO OpenServer, UnixWare 7, SCO Unix, FreeBSD, Microsoft Windows NT, UnixWare 2.1, HP-UX 11i, Microsoft Windows 98/ME/2000, Microsoft Windows XP Embedded, Linux 2.4.x, IBM AIX 5.x, SunSoft Solaris 10, Microsoft Windows Embedded CE 6.0, Linux 2.6.x, Microsoft Windows Vista (32/64 bits), Microsoft Windows 7 (32/64 bits), Microsoft Windows XP (32/64 bits), Microsoft Windows Server 2008 (32/64-bits), Microsoft Windows Server 2003 (32/64-bits), Oracle Solaris 10, Linux 3.x, QNX 4.25, QNX 6

Generelt

Enhedstype:	Server til trådløse enheder
Bredde:	7.7 cm
Dybde:	11.1 cm
Højde:	2.6 cm
Vægt:	177 g

Processor / Hukommelse / Lagring

RAM:	20 MB
------	-------

Miljømæssige parametre

Min. driftstemperatur:	0 °C
Maks. driftstemperatur:	55 °C
Fugtighedsgrad ved brug:	5 - 95 % (ikke-kondenserende)

Producentgaranti

Service & Support:	Begrænset garanti - 5 år
--------------------	--------------------------

Programmer / Systemkrav

Med software:	Drivers & Utilities
---------------	---------------------

Programmer / Systemkrav

OS nødvendig:	SCO OpenServer, UnixWare 7, SCO Unix, FreeBSD, Microsoft Windows NT, UnixWare 2.1, HP-UX 11i, Microsoft Windows 98/ME/2000, Microsoft Windows XP Embedded, Linux 2.4.x, IBM AIX 5.x, SunSoft Solaris 10, Microsoft Windows Embedded CE 6.0, Linux 2.6.x, Microsoft Windows Vista (32/64 bits), Microsoft Windows 7 (32/64 bits), Microsoft Windows XP (32/64 bits), Microsoft Windows Server 2008 (32/64-bits), Microsoft Windows Server 2003 (32/64-bits), Oracle Solaris 10, Linux 3.x, QNX 4.25, QNX 6
------------------	---

Effekt

Strømenhed:	Ekstern strømforsyning
-------------	------------------------

Diverse

Medfølgende ledninger:	1 x krydskabel
------------------------	----------------

MTBF (forventet tid mellem fejl):	363,327 timer
-----------------------------------	---------------

Overensstemmelsesstandarder:	VCCI, EN55022 Klasse A, FCC Part 15 C, UL 60950-1, EN 60950-1, FCC Part 15 E, ARIB STD-T66, ARIB STD-T33, FCC Part 15 B Class A, EN 300 328, EN 301 893
------------------------------	--

Ekspansion / Konnektivitet

Interface:	2 x RS-232/422/485 - DB-9 1 x 100Base-TX - RJ-45 1 x antenne
------------	---

Antenne

Antenne:	Aftagelig eksternt
----------	--------------------


Antal antenner:	1
-----------------	---

Netværk

Model:	Ekstern
--------	---------

Antal porte:	2
--------------	---

Forbindelsesteknologi:	Trådløs, kabling
------------------------	------------------

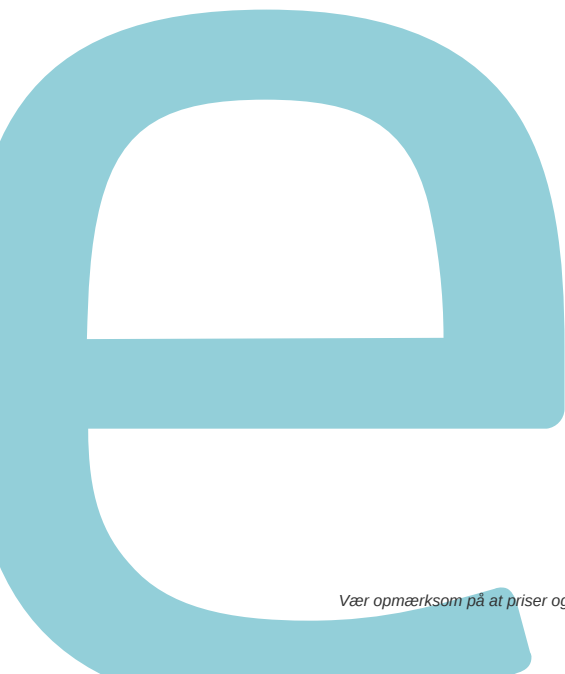

Netværk

Dataoverførselshastighed: 921.6 Kbps

Dataforbindelsesprotokol: Ethernet, Fast Ethernet, RS-232, IEEE 802.11b, IEEE 802.11a, IEEE 802.11g, RS-422, RS-485

Spread-spectrum metode: DSSS

Netværks/overførselsprotokol: TCP/IP, UDP/IP, ICMP/IP, SMTP, DHCP, DNS

Protokol til fjernadministration: SNMP 1, Telnet, SNMP 3, SNMP 2c, HTTP, HTTPS, SSH

Maks. afstand udendørs: 100 m

Statusindikatorer: Portstatus, strøm, signalstyrke, WLAN

Egenskaber: DHCP-understøttelse, auto-uplink (auto MDI/MDI-X), SNTP-understøttet

Krypterings algoritme: MD5, 128-bit WEP, 64-bit WEP, TLS, PEAP, TTLS, TKIP, WPA, WPA2, WPA-PSK, AES-CCMP, WPA2-PSK, WPA-Enterprise, WPA2-Enterprise

Autentificeringsmetode: PAP, MS-CHAP, MS-CHAP v.2, Extensible Authentication Protocol (EAP)

Overensstemmelsesstandarder: IEEE 802.11b, IEEE 802.11a, IEEE 802.11g, IEEE 802.11i