


Lenovo ThinkSystem 530-16i - storage controller (RAID) - SATA / SAS 12Gb/s - PCIe 3.0 x8

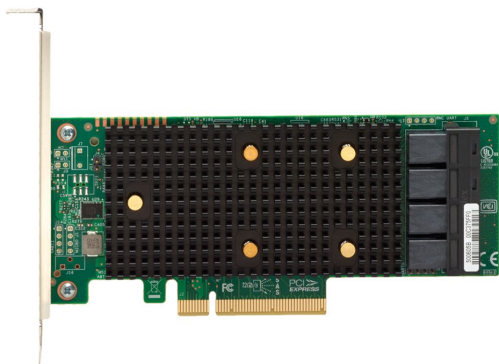

01-10-2024

SKU	4Y37A09727
Produktbeskrivelse:	Lenovo ThinkSystem 530-16i - styreenhed til lagring (RAID) - SATA / SAS 12Gb/s - PCIe 3.0 x8
Enhedstype:	Styreenhed til lagring (RAID) - indstikskort - lavprofil
Bustype:	PCIe 3.0 x8
Interface:	SATA / SAS 12Gb/s
Dataoverførselshastighed:	12 Gbit/s
Understøttede enheder:	Harddisk, diskarray (RAID), solid state drev
Antal kanaler:	16

Generelt

Enhedstype:	Styreenhed til lagring (RAID) - indstikskort - lavprofil
Host Bus:	PCIe 3.0 x8

Controller for lagring

Interface:	SATA / SAS 12Gb/s
Dataoverførselshastighed:	12 Gbit/s
Understøttede enheder:	Harddisk, diskarray (RAID), solid state drev
Antal kanaler:	16
Maks. antal lagerenheder:	16
RAID-niveau:	RAID 0, RAID 1, RAID 10, JBOD
Processor:	LSI LSISAS3416

Ekspansion / Konnektivitet

Interface:	4 x SAS 12Gb/s - 4 x Mini SAS HD (SFF-8643) (intern)
------------	--

Oplysninger om kompatibilitet

Designet for:	Lenovo ThinkSystem SR590 7X98, 7X99 ; Lenovo ThinkSystem SR630 7X01, 7X02 ; Lenovo ThinkSystem SR630 V2 7Z71 ; Lenovo ThinkSystem SR645 7D2X ; Lenovo ThinkSystem SR650 7X05, 7X06 ; Lenovo ThinkSystem SR650 V2 7D15, 7Z73 ; Lenovo ThinkSystem SR665 7D2V, 7D2W ; Lenovo ThinkSystem SR850 V2 7D32 ; Lenovo ThinkSystem SR860 V2 7Z60 ; Lenovo ThinkSystem ST650 V2 7Z74, 7Z75
---------------	---

Miljømæssige parametre

Min. driftstemperatur:	10 °C
Maks. driftstemperatur:	55 °C
Fugtighedsgrad ved brug:	20 - 90 % (ikke-kondenserende)

Producentgaranti

Service & Support:	Begrænset garanti - 1 år
--------------------	--------------------------

Diverse

Diverse

Egenskaber:

Online Capacity
Expansion (OCE),
Online RAID Level
Migration (RLM), Disk
Data Format (DDF)
support, S.M.A.R.T.
support, Self-
Encrypting Drive
(SED) support,
FastPath, SafeStore

Overensstemmelsesstandarder:

EN55022, EN55024,
ICES-003 Class B,
RoHS, WEEE, FCC
Part 15 A, VCCI V-3,
AS/NZS CISPR 22,
CNS 13438, FCC
CFR47 Part 15 B Class
B, IEC/EN/UL 60950

